THIS DRAWING AND THE DESIGN SHOWN IS THE PROPERTY OF THE ARCHITECT AND MAY NOT BE REPRODUCED, COPIED OR USED WITHOUT WRITTEN PERMISSION. COPYRIGHT © 2014. INTEC Group, Inc.

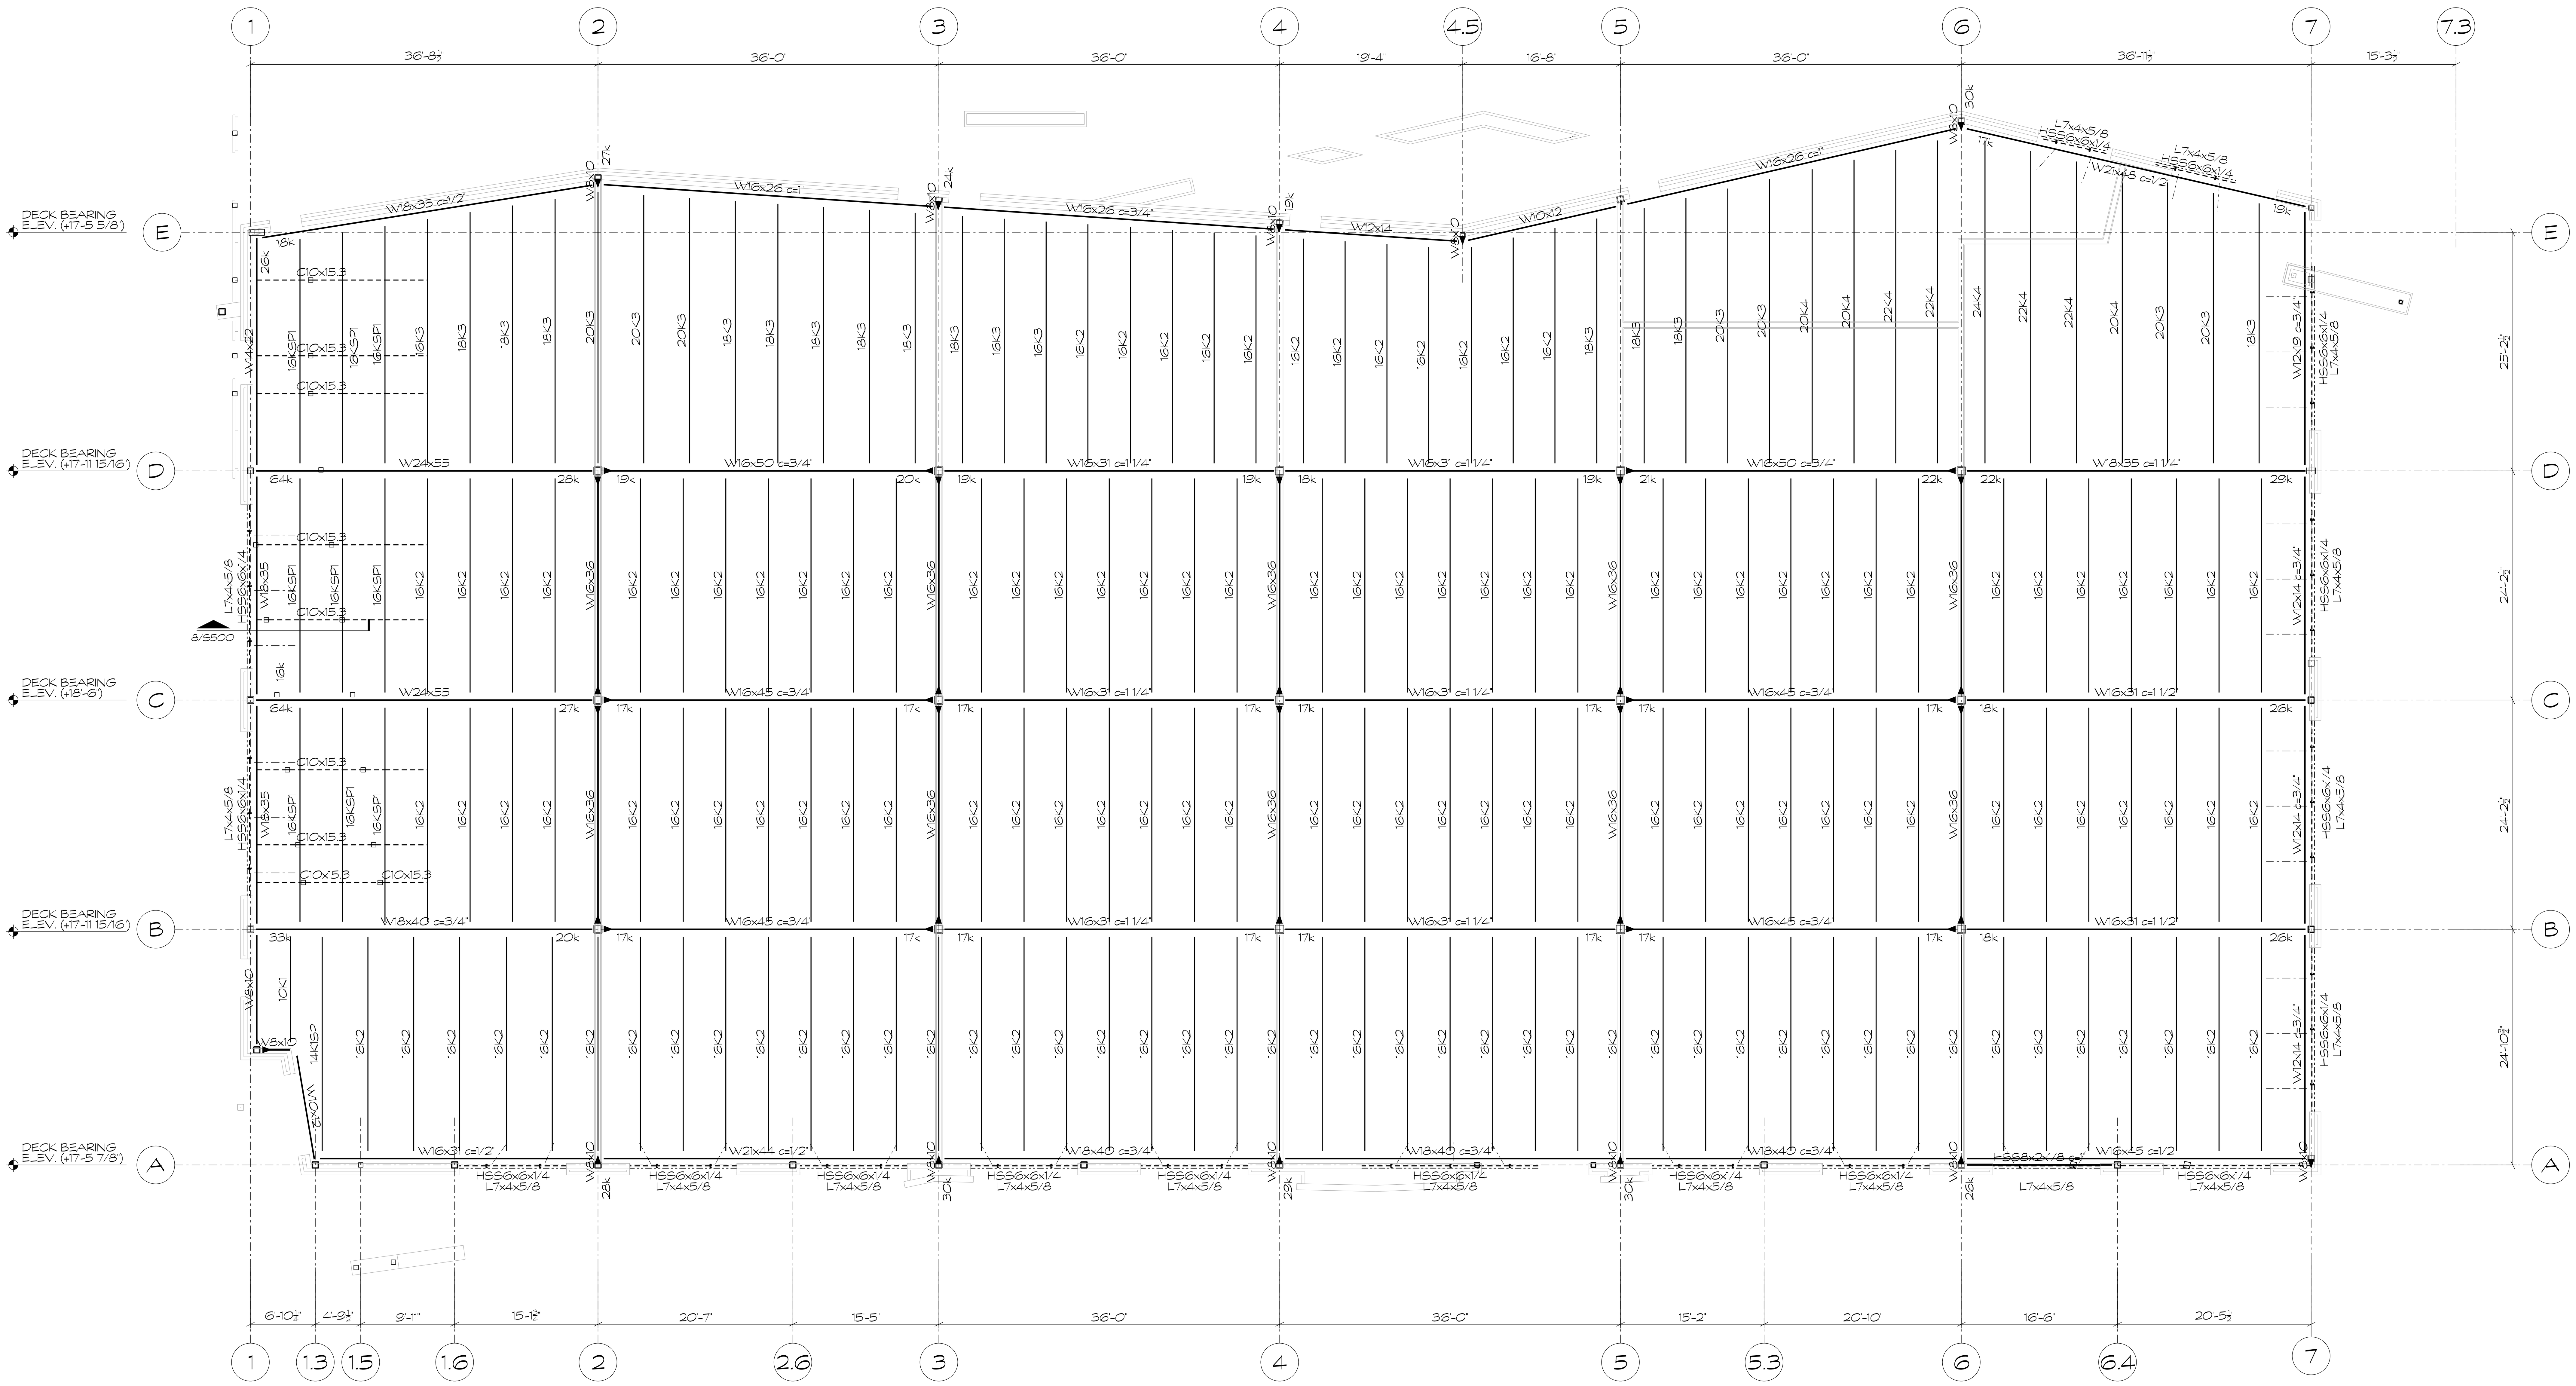

ROOF FRAMING PLAN
1/8"=1'-0"
1 S200

PLAN NOTES:
1. TOP OF ROOF FRAMING ELEVATION VARIES, SEE PLAN.
2. FOR GENERAL NOTES, SEE SHEETS S300 AND S301. FOR TYPICAL ROOF FRAMING DETAILS, SEE SHEET S500.
3. DECK BEARING ELEVATION VARIES, SEE PLAN.
4. ROOF DECK IS 1½", 22 GAGE, TYPE "B", G60, METAL ROOF DECK. ROOF ATTACHMENT SHALL BE 5/8" PUDDLE WELDS AT 6" O.C. WITH (X) SIDELAP CONNECTIONS (#10 TEK SCREWS) PER SPAN. SEE TYPICAL DECK FASTENER DETAIL ON SHEET S500.
5. DO NOT HANG PIPING AND/OR EQUIPMENT FROM ROOF DECK. CONTRACTOR TO PROVIDE SUPPORT BEAMS FOR HANGER IF NEEDED.
6. ALL STEEL JOISTS SHALL BE DESIGNED IN ACCORDANCE WITH SJI STANDARD SPECIFICATIONS.
7. COORDINATE MECHANICAL SIZE AND LOCATIONS OF CHASE OPENINGS AND ROOF DRAIN OPENINGS ON ROOF, WITH MECHANICAL DRAWINGS. SEE S500 FOR TYPICAL FRAMING.

INTEC
INTEC Group, Inc.
214 W. TREMONT AVENUE
SUITE 301
CHARLOTTE, NC 28203
P: 704.372.7910
www.intecgroup.net

CRESCENT COMMUNITIES
ASANA PARTNERS

PROJECT

CRESCENT COMMUNITIES
36TH STREET, CHARLOTTE, NC
NoDa RETAIL BUILDING

STAMP

PRELIMINARY
NOT FOR CONSTRUCTION

19520 W. Catawba Ave.
Suite 311
Cornelius, NC 28031
p 704-987-9114
NC LICENSE NO. P-0366
FEG JOB# 173986.000
Fitzpatrick ENGINEERING GROUP PLLC
STRUCTURAL ENGINEERS

DRAWING LOG

ISSUE: DESIGN DEVELOPMET
DATE: 4/26/17

SHEET INFORMATION
DATE OF DRAWING: 4/26/17
DRAWN BY: SRG
JOB NUMBER: 119201

S200