

GENERAL NOTES:

ALL WORK AND MATERIALS SHALL COMPLY WITH ALL CITY, COUNTY AND STATE REGULATIONS AND CODES AND O.S.H.A. STANDARDS. NO WORK WITHIN NCDOT OR CITY OF CHARLOTTE RIGHT OF WAY SHALL TAKE PLACE WITHOUT ALL PERMITS. EXISTING STRUCTURES WITHIN THE CONSTRUCTION LIMITS ARE TO BE ABANDONED, REMOVED OR RELOCATED AS NECESSARY. ALL COST SHALL BE INCLUDED IN BASE BID.

CONTRACTOR SHALL BE RESPONSIBLE FOR ALL RELOCATIONS, INCLUDING BUT NOT LIMITED TO, ALL UTILITIES, STORM DRAINAGE, SIGNS, ETC. AS REQUIRED. ALL WORK SHALL BE IN ACCORDANCE WITH GOVERNING AUTHORITIES SPECIFICATIONS AND SHALL BE APPROVED BY SUCH. ALL COST SHALL BE INCLUDED IN BASE BID. AREAS TO BE DISTURBED SHALL BE IMPROVED PER THE CIVIL PLANS OR RESTORED TO THEIR ORIGINAL OR BETTER CONDITION. CONTRACTOR SHALL REPAIR ANY EXISTING FEATURES THAT ARE DAMAGED DURING CONSTRUCTION TO THE EXISTING OR BETTER CONDITION.

APPROVAL OF THIS PLAN IS NOT AN AUTHORIZATION TO GRADE ADJACENT PROPERTIES. ANY GRADING BEYOND THE LIMITS OF CONSTRUCTION AS SHOWN ON THE GRADING AND DRAINAGE PLAN WITHOUT AUTHORIZATION IS SUBJECT TO A FINE. WHEN FIELD CONDITIONS WARRANT OFF-SITE GRADING, PERMISSION MUST BE OBTAINED FROM THE AFFECTED PROPERTY OWNERS AND THE CITY OF CHARLOTTE.

CONTRACTOR AGREES TO REPAIR ANY DAMAGE TO THE PUBLIC RIGHT-OF-WAY IN ACCORDANCE WITH THE STANDARDS OF THE NCDOT AND THE CITY OF CHARLOTTE. ALL STANDARD NUMBERS REFER TO THE NCDOT STANDARD DETAILS AND SPECIFICATIONS AND THE LATEST EDITION OF THE CHARLOTTE LAND DEVELOPMENT STANDARDS MANUAL. IT IS THE CONTRACTORS RESPONSIBILITY TO OBTAIN COPIES OF THESE PUBLICATIONS AND THE FAMILIARIZE THEMSELVES WITH THE INFORMATION CONTAINED HEREIN.

CONTRACTOR SHALL IMMEDIATELY REPORT TO THE OWNER ANY DISCREPANCIES FOUND BETWEEN THE ACTUAL FIELD CONDITIONS AND THE CONSTRUCTION DOCUMENTS AND SHALL WAIT FOR INSTRUCTION PRIOR TO PROCEEDING. THE CONTRACTOR SHALL MAINTAIN EACH STREAM, CREEK, OR BACKWASH CHANNEL IN A UNOBSTRUCTED STATE AND SHALL REMOVE FROM THE CHANNEL AND BANKS OF THE STREAM ALL DEBRIS, LOGS, TIMBER, JUNK AND OTHER ACCUMULATIONS.

CONTRACTOR SHALL ADJUST AND/OR CUT EXISTING PAVEMENT AS NECESSARY AND AT NO ADDITIONAL COST TO ASSURE A SMOOTH FIT AND CONTINUOUS GRADE. CONTRACTOR SHALL POST ASSIGNED BUILDING PERMIT NUMBER AND ADDRESS ON BUILDING. IN ROLLING OR HILLY TERRAINS, SWEEPING OF THE STONE BASE AND/OR APPLICATION OF A TACK COAT MAY BE REQUIRED NEAR INTERSECTIONS. THESE REQUIREMENTS WILL BE ESTABLISHED BY THE INSPECTOR AND BASED ON FIELD CONDITIONS.

CONTACT THE UTILITY COMPANY TO RELOCATE ANY EXISTING UTILITY AND/OR LIGHT POLES. ALL EXISTING FACILITIES WHICH CONFLICT WITH THE IMPROVEMENTS UNDER THE SCOPE OF THIS PROJECT MUST BE RELOCATED AT THE EXPENSE OF THE CONTRACTOR. ANY MUNICIPALITY REQUIRED AS-BUILT DRAWINGS WILL BE PREPARED BY A NC LICENSED PROFESSIONAL SURVEYOR. COSTS FOR THESE SERVICES SHALL BE INCLUDED IN CONTRACTORS BASE BID.

CONTACT THE UTILITY COMPANY TO RELOCATE ANY EXISTING UTILITY AND/OR LIGHT POLES. ALL EXISTING FACILITIES WHICH CONFLICT WITH THE IMPROVEMENTS UNDER THE SCOPE OF THIS PROJECT MUST BE RELOCATED AT THE EXPENSE OF THE CONTRACTOR. ANY MUNICIPALITY REQUIRED AS-BUILT DRAWINGS WILL BE PREPARED BY A NC LICENSED PROFESSIONAL SURVEYOR. COSTS FOR THESE SERVICES SHALL BE INCLUDED IN CONTRACTORS BASE BID.

EROSION CONTROL NOTES:

TOTAL AREA DISTURBED - SEE GRADING PLANS FOR PHASING DETAILS. LIMITS OF GRADING SHOWN ON THE PLAN ARE MAXIMUM LIMITS FOR EROSION CONTROL PURPOSES ONLY. SURVEYOR TO DETERMINE ACTUAL LIMIT. CONTRACTOR SHALL COORDINATE ALL WORK WITH THE CITY OF CHARLOTTE. ALL 'STD.' NUMBERS REFER TO THE CHARLOTTE LAND DEVELOPMENT STANDARDS MANUAL AND THE NCDOT STANDARD DETAILS AND SPECIFICATIONS.

ON-SITE BURIAL PITS REQUIRE AN ON-SITE DEMOLITION LANDFILL PERMIT FROM THE ZONING ADMINISTRATOR. ANY GRADING BEYOND THE DENUDED LIMITS SHOWN ON THE PLAN IS A VIOLATION OF THE CITY/COUNTY EROSION CONTROL ORDINANCE AND IS SUBJECT TO A FINE. GRADING MORE THAN ONE ACRE WITHOUT AN APPROVED EROSION CONTROL PLAN IS A VIOLATION OF THE CITY/COUNTY EROSION CONTROL ORDINANCE AND IS SUBJECT TO A FINE.

ADDITIONAL MEASURES TO CONTROL EROSION AND SEDIMENT MAY BE REQUIRED BY A REPRESENTATIVE OF THE CITY ENGINEERING DEPARTMENT. SLOPES SHALL BE GRADED NO STEEPER THAN 2:1. FILL SLOPES GREATER THAN 10' REQUIRE ADEQUATE TERRACING (CLDSM #30.14). A GRADING PLAN MUST BE SUBMITTED FOR ANY LOT GRADING EXCEEDING ONE ACRE THAT WAS NOT PREVIOUSLY APPROVED. DRIVEWAY PERMIT FOR CONSTRUCTION ENTRANCES IN NCDOT RIGHT OF WAY MUST BE PRESENTED AT PRE-CONSTRUCTION MEETING.

EROSION CONTROL MEASURES SHALL BE INSTALLED PRIOR TO CONSTRUCTION IN ACCORDANCE WITH THE REQUIREMENTS OF THE NORTH CAROLINA SEDIMENTATION POLLUTION CONTROL ACT OF 1973, THE LOCAL JURISDICTIONAL AGENCY, THE APPROVED EROSION CONTROL PERMIT, AND THESE PLANS AND SPECIFICATIONS. THE SEDIMENT TRAPS AND DIVERSION DITCHES SHALL BE CLEANED OUT WHEN THE STORAGE CAPACITY HAS BEEN APPROXIMATELY 50% FILLED. GRAVEL SHALL BE CLEANED OR REPLACED WHEN THE SEDIMENT POOL NO LONGER DRAINS PROPERLY.

ALL EROSION AND SEDIMENT CONTROL PRACTICES SHALL BE INSPECTED WEEKLY AND AFTER EVERY 0.5 INCH RAINFALL EVENT, BUT IN NO CASE LESS THAN ONCE EVERY WEEK. NEEDED REPAIRS SHALL BE MADE IMMEDIATELY. SUBMIT WRITTEN REPORT WITH EACH INSPECTION TO THE OWNER. SEDIMENT WILL BE REMOVED FROM BEHIND THE SILT FENCING WHEN IT BECOMES 6-INCHES DEEP AT THE FENCE. THE FENCING WILL BE REPAIRED AS NECESSARY TO MAINTAIN SUFFICIENT BARRIER.

ALL DRAINAGE SWALES MUST BE GRASSED AND RIP-RAP MUST BE REPLACED AS REQUIRED TO CONTROL EROSION. RIP-RAP WILL CONSIST OF 50 TO 125 POUND STONES PLACED AT ALL HEADWALLS, AND WHERE NOTED ON CONSTRUCTION DRAWINGS. (SEE DETAIL SHEET FOR OUTFALL PIPE SIZE CHART). ADDITIONAL EROSION CONTROL MEASURES OR SILT BARRIERS TO BE PLACED AS DIRECTED BY THE LOCAL JURISDICTIONAL INSPECTOR. WHEN ANY CONSTRUCTION BORDERS A DRAINAGE COURSE:

- A. THE CONTRACTOR IS RESPONSIBLE FOR REMOVING ANY BUILDING OR OTHER EXCAVATION SPOIL, DIRT, CONSTRUCTION TRASH OR DEBRIS, ETC., FROM THE DRAINAGE AREA SHOWN HEREON IN AN EXPEDITIOUS MANNER AS CONSTRUCTION PROGRESSES. B. THE CONTRACTOR HEREBY AGREES TO STOP ALL WORK AND RESTORE THESE IMMEDIATELY UPON NOTIFICATION BY THE LOCAL JURISDICTIONAL INSPECTOR AND/OR THE OWNER.

FOR ALL CONSTRUCTION ALONG AND/OR ACROSS WATERWAYS, BANK PROTECTION AND STABILIZATION SHALL BE REQUIRED AS PER LOCAL JURISDICTIONAL EROSION CONTROL LAWS. ALL TREE PROTECTION AND EROSION CONTROL MEASURES SHALL BE IN PLACE PRIOR TO COMMENCING CONSTRUCTION AND SHALL BE MAINTAINED IN PROPER WORKING ORDER UNTIL ALL DISTURBED AREAS ARE STABILIZED AND GROUND COVER IS ESTABLISHED. CONSTRUCTION ENTRANCE PADS SHALL BE INSTALLED BY THE CONTRACTOR AT CONSTRUCTION ACCESS POINTS PRIOR TO LAND DISTURBANCE.

CITY OF CHARLOTTE STANDARD NOTES:

- 1. COORDINATE ALL CURB AND STREET GRADES IN INTERSECTION WITH INSPECTOR. 2. ALL ROAD IMPROVEMENTS INDICATED ON PLANS (IF ANY) ARE TO BE COORDINATED WITH THE CITY OF CHARLOTTE ENGINEERING DEPARTMENT PRIOR TO CONSTRUCTION. 3. DEVELOPER WILL PROVIDE STREET SIGNS PER CLDSM 50.05 (9' SIGNS ONLY). 4. SIGHT TRIANGLES SHOWN ARE THE MINIMUM REQUIRED. 5. IN ROLLING AND HILLY TERRAINS, SWEEPING OF THE STONE BASE AND/OR APPLICATION OF A TACK COAT MAY BE REQUIRED NEAR INTERSECTIONS. THESE REQUIREMENTS WILL BE ESTABLISHED BY THE INSPECTOR AND BASED ON FIELD CONDITIONS. 6. APPROVAL OF THIS PLAN IS NOT AN AUTHORIZATION TO GRADE ADJACENT PROPERTIES. WHEN FIELD CONDITIONS WARRANT OFF-SITE GRADING, PERMISSION MUST BE OBTAINED FROM THE AFFECTED PROPERTY OWNERS. 7. IN ORDER TO ENSURE PROPER DRAINAGE, KEEP A MINIMUM OF 0.5% SLOPE ON THE CURB. 8. SUBSURFACE DRAINAGE FACILITIES MAY BE REQUIRED IN THE STREET RIGHT-OF-WAY IF DEEMED NECESSARY BY THE INSPECTOR. 9. CURB AND GUTTER SHOWN ON PLANS ALONG PUBLIC ROADWAY MAY BE ADJUSTED BASED UPON FIELD STAKING BY CITY ENGINEERING. ASSOCIATED STORM DRAINAGE MAY ALSO REQUIRE MODIFICATION BASED UPON FIELD CONDITIONS. 10. THE PURPOSE OF THE STORM DRAINAGE EASEMENT (SDE) IS TO PROVIDE STORM WATER CONVEYANCE. BUILDINGS ARE NOT PERMITTED IN THE EASEMENT AREA. ANY OTHER OBJECTS WHICH IMPEDE STORM WATER FLOW OR SYSTEM MAINTENANCE ARE ALSO PROHIBITED. 11. HIGH-DENSITY POLYETHYLENE (HDPE) STORM DRAINAGE PIPE INSTALLED WITHIN EXISTING OR PROPOSED PUBLIC STREET RIGHT-OF-WAY MUST BE APPROVED BY THE CITY'S INSPECTOR PRIOR TO ANY BACKFILL BEING PLACED. BACKFILL MATERIAL MUST BE APPROVED BY THE CITY INSPECTOR PRIOR TO PLACEMENT OF THE MATERIAL WITHIN THE PUBLIC STREET RIGHT-OF-WAY. 12. THE DEVELOPER SHALL MAINTAIN EACH STREAM, CREEK, OR BACKWASH CHANNEL IN AN UNOBSTRUCTED STATE AND SHALL REMOVE FROM THE CHANNEL AND BANKS OF THE STREAM ALL DEBRIS, LOGS, TIMBER, JUNK AND OTHER ACCUMULATIONS. 13. ANY BUILDING WITHIN THE 100-1 STORMWATER ELEVATION LINE IS SUBJECT TO THE RESTRICTIONS OF THE (CITY OF CHARLOTTE/MECKLENBURG COUNTY) SUBDIVISION ORDINANCE, SECTION 7200.8. 14. ANY CONSTRUCTION OR USE WITHIN THE FUTURE CONDITIONS FLOOD FRINGE LINE IS SUBJECT TO THE RESTRICTIONS IMPOSED BY THE FLOODWAY REGULATIONS OF THE CITY OF CHARLOTTE AND MECKLENBURG COUNTY. 15. ALL OPENINGS (E.G. DOORS, WINDOWS, VENTS) IN STRUCTURES BUILT ON LOT #S SHOULD BE LOCATED A MINIMUM OF ONE FOOT ABOVE THE ADJACENT FINISHED GROUND SURFACE (APPLIES TO LOTS WHICH MAY EXPERIENCE SIGNIFICANT OVERLAND FLOW NOT CONSIDERED IN THE 100-1 FLOOD ANALYSIS). 16. PE SEALED SHOP DRAWINGS FOR RETAINING WALL MUST BE SUBMITTED TO CITY ENGINEER PRIOR TO CONSTRUCTION. 17. 'AS-BUILT' DRAWINGS AND PLANS OF THE STORM DRAINAGE SYSTEM, INCLUDING DESIGNED DITCHES, MUST BE SUBMITTED PRIOR TO SUBDIVISION FINAL INSPECTION TO THE CITY/COUNTY ENGINEERING DEPARTMENT IN ACCORDANCE WITH THE CITY/COUNTY SUBDIVISION ORDINANCE. 18. PRIOR TO INSTALLATION, PE SEALED SHOP DRAWINGS FOR UNDERGROUND DETENTION SYSTEMS MUST BE FURNISHED TO CITY OF CHARLOTTE ENGINEERING FOR APPROVAL. 19. PRIOR TO CDO, SURVEYOR SEALED AS-BUILT DRAWINGS OF UNDERGROUND DETENTION SYSTEMS MUST BE PROVIDED. 20. PRIOR TO PLAT RECORDEATION, OFF-SITE ROW AND/OR CONSTRUCTION EASEMENTS ARE REQUIRED TO BE OBTAINED ACCORDING TO THE GUIDELINES OF THE 'OFF-SITE ROW ACQUISITION PROCESS'. THESE NEEDED ROW AND CONSTRUCTION LIMITS ARE CLEARLY SHOWN ON THE ROADWAY IMPROVEMENT PLAN. 21. PER SECTION 18-175(D) OF THE CITY CODE AND SECTION 10.0 OF THE CITY'S POST CONSTRUCTION CONTROLS ADMINISTRATIVE MANUAL, ALL REQUIRED NATURAL AREAS AND/OR POAST CONSTRUCTION CONTROLS EASEMENTS (PCEs) MUST BE RECORDED PRIOR TO THE ISSUANCE OF THE CERTIFICATE OF OCCUPANCY. 22. THE DEVELOPER SHALL CONTACT THE CHARLOTTE DEPARTMENT OF TRANSPORTATION (GUS JORD, 704-336-7888) TO IDENTIFY ANY CONFLICTS WITH TRAFFIC SIGNALIZATION EQUIPMENT. 60-90 DAYS WILL BE REQUIRED TO COORDINATE RELOCATION. DEVELOPER SHALL BE RESPONSIBLE FOR ALL RELATED RELOCATION COST AND/OR REPAIR COST CAUSED BY THE CONTRACTOR/DEVELOPER. 23. CERTIFICATION AND STREET CUT PERMITS ARE REQUIRED FOR UTILITY CUTS ON CITY STREETS. ALLOW 7 DAYS PROCESSING FOR PERMIT. FOR INFORMATION CONTACT CHARLOTTE DEPARTMENT OF TRANSPORTATION (704-336-4025) OR VISIT http://www.charmeck.org/Department/Transportation/Street-Maintenance/Home.htm 24. NON-STANDARD ITEMS (E. PAVERS, IRRIGATION SYSTEMS ETC.) IN THE RIGHT-OF-WAY REQUIRE A RIGHT-OF-WAY ENCROACHMENT AGREEMENT WITH THE CHARLOTTE DEPARTMENT OF TRANSPORTATION/NORTH CAROLINA DEPARTMENT OF TRANSPORTATION BEFORE INSTALLATION. FOR CITY OF CHARLOTTE MAINTAINED STREETS, CONTACT CDOT AT 704-336-3888. 25. ANY WORK WITHIN THE CITY'S ROW THAT REQUIRES CLOSURE OF THE SIDEWALK OR TRAVEL LANE FOR LESS THAN 30 DAYS REQUIRES A ROW USE PERMIT. TRAFFIC CONTROL PLANS FOR ANY SIDEWALK OR TRAVEL LANE CLOSURES MUST BE SUBMITTED AS PART OF THE ROW USE PERMIT REQUEST. TRAFFIC CONTROL PLANS MUST BE IN ACCORDANCE WITH CDOT'S WORK AREA TRAFFIC CONTROL HANDBOOK (WATCH) AND MUST BE REVIEWED AND APPROVED. CONTRACTOR SHALL CONTACT CDOT AT LEAST 5 BUSINESS DAYS IN ADVANCE OF BEGINNING OF WORK AT 704-432-1562. 26. CONSTRUCTION STAGING WITHIN CITY ROW LASTING MORE THAN 30 DAYS REQUIRES A ROW LEASE AGREEMENT. CONTRACTOR SHALL CONTACT CDOT AT 704-336-2562. 27. RIGHT-OF-WAY CLOSURES LONGER THAN 30 DAYS REQUIRE A ROW LEASE AGREEMENT WHICH WILL INCLUDE THE SUBMITTAL OF A TRAFFIC CONTROL PLAN. TRAFFIC CONTROL PLANS REQUIRED THROUGH A LEASE AGREEMENT MAY BE DIFFERENT FROM THE ONE REQUIRED DURING THE LAND DEVELOPMENT PLAN REVIEW AND ARE SUBJECT TO REVISIONS. THE REVISED TRAFFIC CONTROL PLANS MUST BE SUBMITTED AS PART OF THE LEASE AGREEMENT PROCESS FOR APPROVAL PRIOR TO START OF ROW CLOSURES. CONTRACTOR SHALL CONTACT CDOT AT 704-336-2562.

SEDIMENT AND EROSION CONTROL PROCEDURES

- 1. PRIOR TO CLEARING AND EARTHWORK ACTIVITIES THE CONTRACTOR SHALL HAVE A PRE-CONSTRUCTION CONFERENCE WITH THE CITY OF CHARLOTTE INSPECTOR. INSTALL EROSION CONTROL DEVICES SPECIFIED AND AS INDICATED ON THE DRAWINGS, AND THEN OBTAIN AN APPROVED GRADING PERMIT. DURING EACH PHASE OF SITE CONSTRUCTION THE CONTRACTOR SHALL ADJUST, RELOCATE AND/OR REINSTALL AS APPLICABLE ALL EROSION CONTROL DEVICES AND SEDIMENT DISCHARGE FROM THE SITE. 2. SILT FENCE SHALL BE MAINTAINED AROUND THE PERIMETER OF ALL EARTHWORK AREAS TO PREVENT SEDIMENT TRANSPORT ONTO ADJACENT PROPERTIES OR OFF-SITE ROADWAYS, AS APPLICABLE. 3. SILT FENCE FILTER BARRIERS SHALL BE INSTALLED AND MAINTAINED UNTIL CONSTRUCTION IS COMPLETE AND LANDSCAPING IS INSTALLED. 4. THE CONTRACTOR SHALL IMMEDIATELY CLEANUP AND REPAIR ALL EROSION DAMAGE AFTER DISCOVERY AND REINSTALL ADEQUATE CONTROL MEASURES AS NECESSARY TO PREVENT REOCCURRENCE OF DAMAGE. 5. ALL EROSION AND SEDIMENT CONTROL PRACTICES SHALL BE INSPECTED WEEKLY AND AFTER EVERY 0.5 INCH RAINFALL EVENT, BUT IN NO CASE LESS THAN ONCE EVERY WEEK. NEEDED REPAIRS SHALL BE MADE IMMEDIATELY. SUBMIT WRITTEN REPORT WITH EACH INSPECTION TO THE OWNER. 6. STABILIZATION MEASURES SHALL BE INITIATED AS SOON AS PRACTICABLE IN PORTIONS OF THE SITE WHERE CONSTRUCTION ACTIVITIES HAVE TEMPORARILY OR PERMANENTLY CEASED, BUT IN NO CASE MORE THAN 14 DAYS AFTER THE CONSTRUCTION ACTIVITY IN THAT PORTION OF THE SITE HAS BEEN TEMPORARILY OR PERMANENTLY CEASED. UNLESS ACTIVITY IN THAT PORTION OF THE SITE WILL RESUME WITHIN 21 DAYS. CONTRACTOR SHALL INSTALL TEMPORARY GRAVEL DRIVEWAY AT EACH CONSTRUCTION ENTRANCE AS SHOWN ON THESE PLANS. 7. CONSTRUCTION POINT OF ACCESS TO LIMIT DEPOSITS OF EARTH AND OTHER HAULED MATERIALS ONTO THE ADJACENT LOT. THE CONTRACTOR SHALL ROUTINELY CLEAN ALL SEDIMENT DEPOSITS AND DEBRIS FROM ROADWAY AS THEY OCCUR. 8. CONTRACTOR WILL TAKE MEASURES TO CONTROL DUST FROM THE WORK SITE AS NECESSARY OR PER THE OWNERS DIRECTION.

RETAINING WALL NOTES:


DESIGN OF ALL RETAINING WALLS IS TO BE PER NC BUILDING CODE SECTION 1610.3. DETAIL RETAINING WALL DESIGN DRAWINGS, SEALED BY AN NC LICENSED ENGINEER WILL BE SUBMITTED TO THE LOCAL AUTHORITY PRIOR TO CONSTRUCTION. SOME RETAINING WALLS WILL REQUIRE SUBMITTAL TO BOTH MECKLENBURG COUNTY CODE ENFORCEMENT AND CITY ENGINEERING LAND DEVELOPMENT. CITY ENGINEERING STAFF WILL IDENTIFY SUCH PROJECTS IN THE REVIEW STAGE.

UTILITY NOTES

- 1. THE CONTRACTOR IS RESPONSIBLE FOR HORIZONTALLY AND VERTICALLY LOCATING AND PROTECTING ALL PUBLIC OR PRIVATE UTILITIES (SHOWN OR NOT SHOWN) WHICH LIE IN OR ADJACENT TO THE CONSTRUCTION SITE. AT LEAST 48 HOURS PRIOR TO ANY DEMOLITION, GRADING, OR CONSTRUCTION ACTIVITY, THE CONTRACTOR SHALL NOTIFY THE ONE-CALL UTILITIES LOCATION SERVICE 811 FOR PROPER IDENTIFICATION OF EXISTING UTILITIES WITHIN THE SITE. 2. SHOULD ANY UNCHARTERED OR INCORRECTLY CHARTED UTILITIES BE ENCOUNTERED, THE CONTRACTOR SHALL CONTACT THE OWNER IMMEDIATELY FOR DIRECTIONS. 3. CONTRACTOR SHALL COORDINATE ANY INTERRUPTION OF UTILITY SERVICE WITH OWNER AND RESPECTIVE UTILITY COMPANY REPRESENTATIVE. 4. THE CONTRACTOR IS RESPONSIBLE FOR THE LOCATION AND PROTECTION OF ALL EXISTING UTILITIES DURING CONSTRUCTION AT LEAST 48 HOURS PRIOR TO ANY DEMOLITION, GRADING, OR CONSTRUCTION ACTIVITY THE CONTRACTOR SHALL NOTIFY THE UTILITY PROVIDER FOR PROPER IDENTIFICATION OF EXISTING UTILITIES WITHIN THE PROJECT SITE. 5. ANY PLANNED INTERRUPTION OF UTILITY SERVICE SHALL BE GIVEN A 48 HOUR NOTICE TO THE UTILITY COMPANY AND THE OWNER. 6. CONTRACTOR SHALL SAW CUT, REMOVE, AND REPLACE ASPHALT PAVEMENT AS NECESSARY TO INSTALL UNDERGROUND ELECTRIC, TELEPHONE, SEWER, WATER, AND COMMUNICATION CONDUITS. 7. ALL ELECTRICAL WORK SHALL BE DONE IN ACCORDANCE WITH LOCAL POWER COMPANY STANDARDS.

BANKS ENGINEERING, PLLC 1919 SOUTH BOULEVARD SUITE 200 CHARLOTTE, NC 28203 T: 704.780.4972 NC License #P-1370 © 2016

Harris Teeter CLIENT: CLIENT: [Name] PROJECT: [Name]

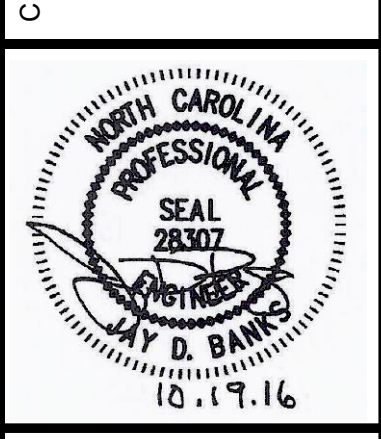

PROJECT: HARRIS TEETER EXPANSION 112 S. SHARON AMITY CHARLOTTE, NC 28211

GENERAL NOTES

Revision table with columns: REV, DATE, DESCRIPTION. Includes entries for backflow reviewer comments, building footprint, and permit reviews.

DESIGNED: JDB DRAWN: CHECKED: PROJECT: 01014001 DATE: 01.13.16

C0-2