

NOTE: THIS DOCUMENT MAY HAVE BEEN ELECTRONICALLY TRANSMITTED. IF UNSIGNED, IT CANNOT BE FILED FOR PUBLIC RECORD. PUBLIC RECORD FILINGS REQUIRE SIGNED AND SEALED DOCUMENTS.

John S. Parker
JOHN S. PARKER
PROFESSIONAL ENGINEER
SEAL 027092
Digitally Signed
Using AdobeTrust Certificate
2016.08.24 16:10:18-04'00'

HARRIS TEETER
STORE # 208
COTSWOLD SHOPPING CENTER
CHARLOTTE, NC


PROJECT MANAGER
KIM STACY
JOB NO.
15-H1208-02
DR. BY
KLG

REVISIONS	Date
No.	Date
No.	Date
No.	Date
No.	Date
No.	Date
No.	Date
No.	Date
No.	Date
No.	Date
No.	Date
No.	Date

DRAWING NAME
PLUMBING DRAINAGE DEMOLITION PLAN

SHEET NO.
P2.0
ISSUE DATE: 08.23.16

- GENERAL NOTES**
- CONTRACTOR SHALL FIELD VERIFY SEWER DEPTHS PRIOR TO STARTING WORK. SHOULD DEPTHS BE DIFFERENT FROM THAT SHOWN, ADVISE ARCHITECTS/ENGINEER IMMEDIATELY.
 - CONTRACTOR SHALL FIELD VERIFY WATER PIPING SIZE AND LOCATIONS PRIOR TO STARTING WORK. SHOULD SIZES BE DIFFERENT FROM THAT SHOWN, ADVISE ARCHITECTS/ENGINEER IMMEDIATELY.
 - PATCH AND REPAIR ALL AREAS DISTURBED DURING RENOVATION TO MATCH EXISTING/NEW FINISHES. COORDINATE WITH G.C.
 - ALL INACTIVE PIPING ABOVE FINISHED FLOOR SHALL BE REMOVED TO ABOVE CEILING AND CAPPED.
 - REFER TO ARCHITECTURAL DRAWINGS FOR ALL WALLS, CEILINGS, DOORS, FLOORS, ETC. WHICH ARE BEING REMOVED.
 - ALL PIPING, VALVES AND MISCELLANEOUS ITEMS REMOVED UNDER THIS CONTRACT SHALL BE REMOVED FROM THE SITE AT THE CONTRACTOR'S EXPENSE UNLESS OTHERWISE NOTED.
 - THE BUILDING IS SCHEDULED TO REMAIN IN OPERATION DURING THE COURSE OF THIS PROJECT. THE CONTRACTOR SHALL SCHEDULE ALL PLUMBING WORK WITH HARRIS TEETER'S CONSTRUCTION REPRESENTATIVE PRIOR TO STARTING ANY WORK.
 - EXISTING FIXTURES INDICATED OR REQUIRED TO BE REMOVED SHALL BE REMOVED UNDAMAGED AND TAKEN FROM SITE AS DIRECTED BY HARRIS TEETER'S FIELD REPRESENTATIVE.
 - THIS CONTRACTOR SHALL BE RESPONSIBLE FOR COORDINATING ALL PLUMBING DEMOLITION WITH HARRIS TEETER. EXISTING FIXTURES MUST REMAIN IN SERVICE AS LONG AS THOSE AREAS REMAIN IN SERVICE.
 - COMPLETE EXTENT OF DEMOLITION SHALL NOT BE LIMITED TO ONLY THAT WHICH IS INDICATED IN DOCUMENTS AND SPECIFICATIONS. CONTRACTOR IS RESPONSIBLE FOR VISITING SITE TO DETERMINE MORE ACCURATELY THE EXTENT OF DEMOLITION REQUIRED PRIOR TO BID SUBMISSION.
 - CONTRACTOR TO REVIEW ALL CONDITIONS PRIOR TO COMMENCING WORK.
 - REMOVE ANY ABANDONED PIPING WHICH CONFLICTS WITH NEW.
 - WHERE PIPING IS INDICATED EXISTING TO REMAIN, EXACT LOCATIONS TO BE DETERMINED IN FIELD.
 - ALL EXISTING INFORMATION BASED ON EXISTING DOCUMENTS AND CRESCENT DRAIN SURVEY REPORT. LOCATION OF UNDERGROUND LINES DEPICTED TO BEST OF INFORMATION AVAILABLE. EXACT LOCATION TO BE VERIFIED IN FIELD.
 - ALL EXISTING TO REMAIN SANITARY AND GREASE LINES SHALL BE JETTED AND THOROUGHLY FLUSHED PRIOR TO ANY NEW CONNECTIONS. IF CONTRACTOR SUSPECTS OR DETERMINED ANY SEWER LINES WITHIN THE FACILITY ARE DAMAGED OR DURING DEMOLITION DISCOVERS LINES ARE BEYOND REPAIR, CONTACT ARCHITECT/ENGINEER AND OR HARRIS TEETER FIELD REPRESENTATIVE FOR FURTHER DIRECTIVE.
- KEYED NOTES (XX)**
- REMOVE FLOOR CLEANOUT AND ASSOCIATED PIPING TO POINT INDICATED.
 - REMOVE HUB DRAIN, TRAP AND ASSOCIATED WASTE PIPING TO POINT INDICATED.
 - REMOVE HUB DRAIN, TRAP AND ASSOCIATED PIPING TO MAIN AND CAP. REMOVE VENT PIPING IN ITS ENTIRETY UP TO VTR. VTR TO REMAIN.
 - REMOVE HUB DRAIN, TRAP AND ASSOCIATED PIPING TO MAIN AND CAP.
 - REMOVE NOTED WASTE PIPING IN ITS ENTIRETY TO POINTS INDICATED.

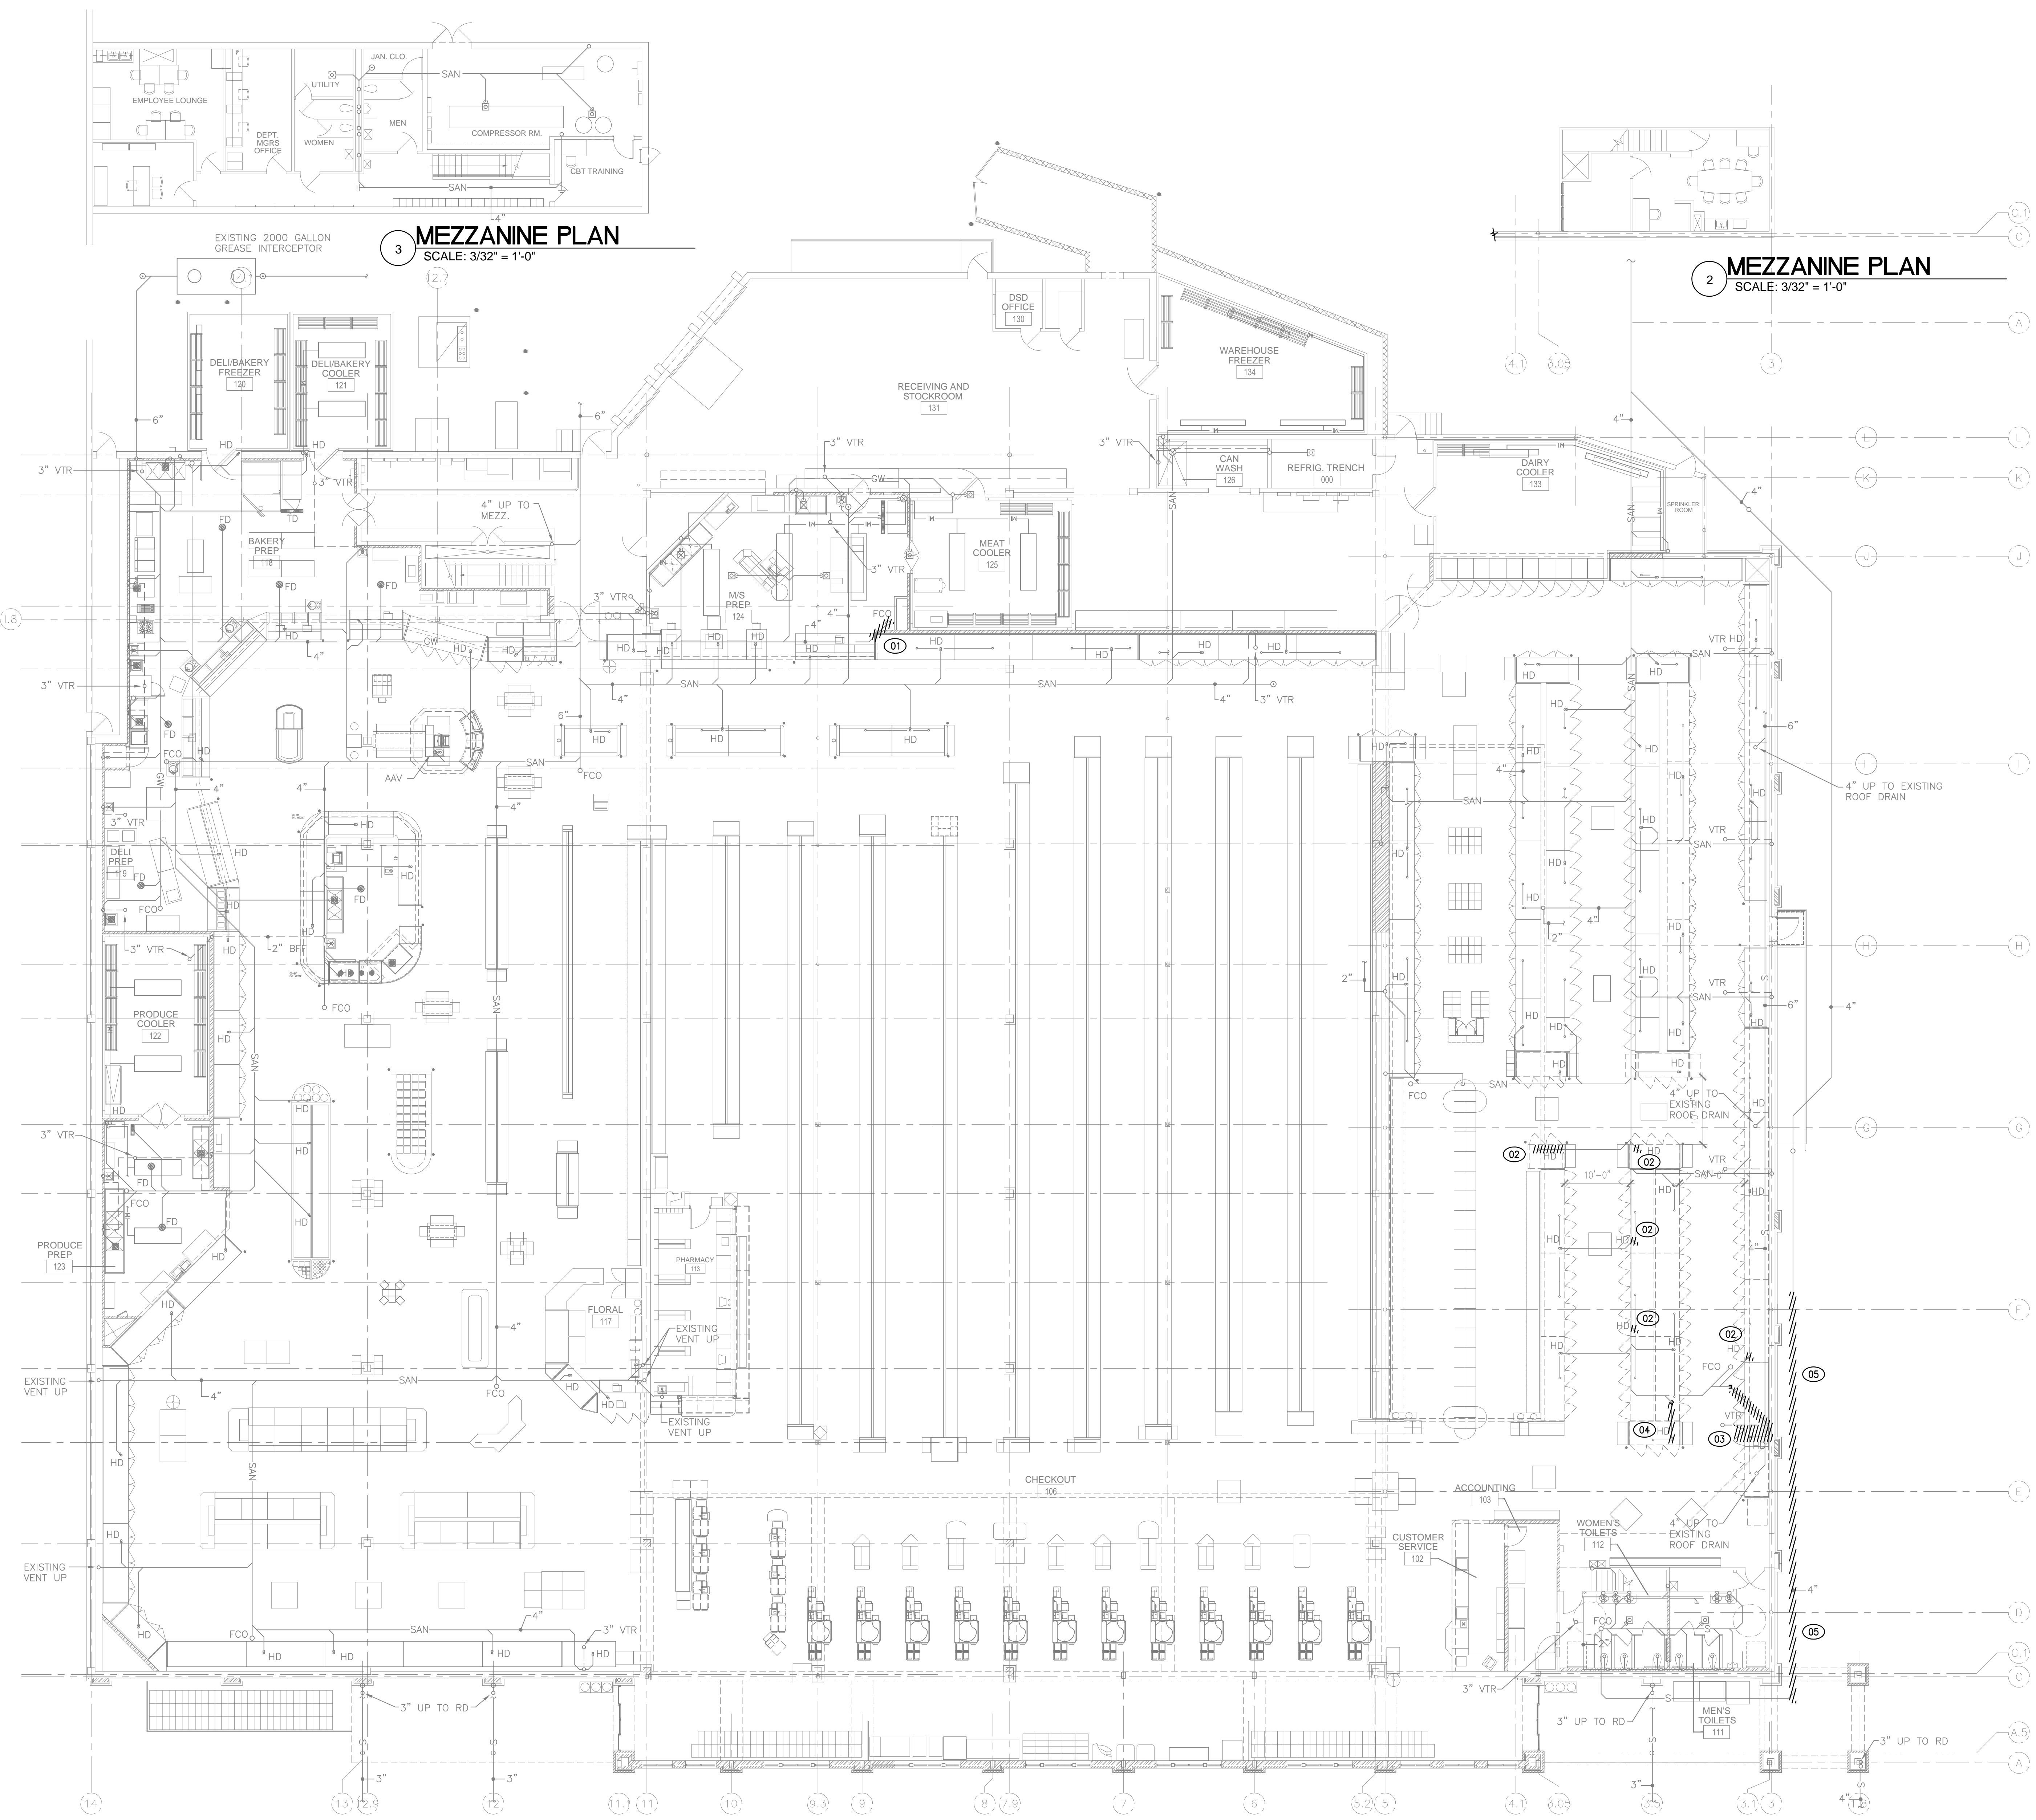

1 PLUMBING DRAINAGE DEMOLITION PLAN
SCALE: 3/32" = 1'-0"

3 MEZZANINE PLAN
SCALE: 3/32" = 1'-0"

2 MEZZANINE PLAN
SCALE: 3/32" = 1'-0"